

## WO9745740

Publication Title:

MAGNETORESISTANCE-BASED METHOD AND APPARATUS FOR  
MOLECULAR DETECTION

Abstract:

Abstract of WO9745740

A binding of a molecule (10) with a molecular receptor (12) at a binding site is sensed using a magnetoresistive member (18) proximate to the binding site. A magnetic field associated with the molecule (10) acts to modify an electrical characteristic of the magnetoresistive member (18) when the molecule (10) binds with the molecular receptor (12). The magnetic field is produced by a magnetic member (20), such as a magnetic bead, attached to the molecule. Preferably, the magnetoresistive member (18) is integrated with a substrate (14) which supports the binding site. A readout device (22), such as a thin-film transistor, can also be integrated on the substrate (14) to provide a signal indicative of a binding event.

Data supplied from the esp@cenet database - Worldwide


-----  
Courtesy of <http://v3.espacenet.com>



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b>  <b>G01N 33/543</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/45740</b>  <b>(43) International Publication Date:</b> 4 December 1997 (04.12.97)
<b>(21) International Application Number:</b> PCT/US97/06848  <b>(22) International Filing Date:</b> 23 April 1997 (23.04.97)  <b>(30) Priority Data:</b> 08/656,647      31 May 1996 (31.05.96)      US  <b>(71) Applicant:</b> MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).  <b>(72) Inventors:</b> SHIEH, Richard; 6739 East Bar Z Lane, Paradise Valley, AZ 85253 (US). ACKLEY, Donald, E.; 317 Goat Hill Road, Lambertville, NJ 08530 (US).  <b>(74) Agents:</b> TOLER, Jeffrey, G. et al.; Motorola Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** MAGNETORESISTANCE-BASED METHOD AND APPARATUS FOR MOLECULAR DETECTION

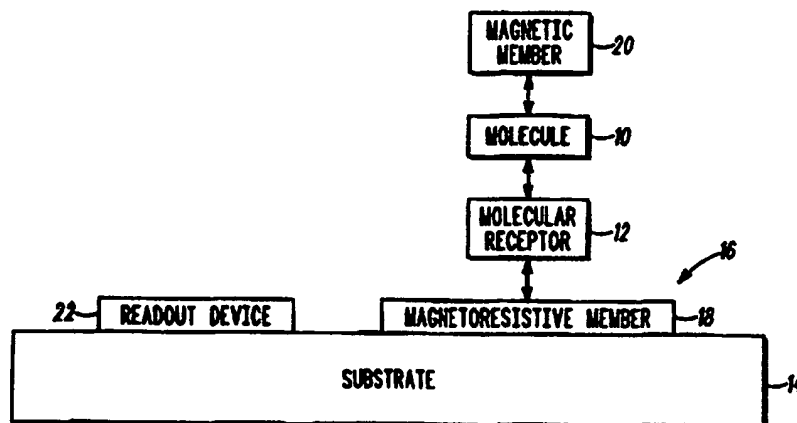**(57) Abstract**

A binding of a molecule (10) with a molecular receptor (12) at a binding site is sensed using a magnetoresistive member (18) proximate to the binding site. A magnetic field associated with the molecule (10) acts to modify an electrical characteristic of the magnetoresistive member (18) when the molecule (10) binds with the molecular receptor (12). The magnetic field is produced by a magnetic member (20), such as a magnetic bead, attached to the molecule. Preferably, the magnetoresistive member (18) is integrated with a substrate (14) which supports the binding site. A readout device (22), such as a thin-film transistor, can also be integrated on the substrate (14) to provide a signal indicative of a binding event.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

0

5

10           MAGNETORESISTANCE-BASED METHOD AND APPARATUS  
                  FOR MOLECULAR DETECTION

                  Field of the Invention

15           The present invention relates to methods and  
                  systems for molecular detection.

                  Background of the Invention

20           An increased effort has been directed toward the  
                  development of chips for molecular detection. In  
                  general, a molecular detection chip includes a substrate  
                  on which an array of binding sites is arranged. Each  
                  binding site, or hybridization site, has a respective  
25           molecular receptor which binds or hybridizes with a  
                  molecule having a predetermined structure.

                  A sample solution is applied to the molecular  
                  detection chip, and molecules in the sample bind or  
                  hybridize at one or more of the binding sites. The  
30           particular binding sites at which hybridization occurs  
                  are detected, and one or more molecular structures  
                  within the sample are subsequently deduced.

                  Of great interest are molecular detection chips for  
                  gene sequencing. These chips, often referred to as DNA

0 chips, utilize an array of selective binding sites each  
having respective single-stranded DNA probes. A sample  
of single-stranded DNA fragments, referred to as target  
DNA, is applied to the DNA chip. The DNA fragments  
attach to one or more of the DNA probes by a  
5 hybridization process. By detecting which DNA probes  
have a DNA fragment hybridized thereto, a sequence of  
nucleotide bases within the DNA fragment can be  
determined.

To hasten the hybridization process, a local  
10 concentration of target DNA can be increased at  
predetermined sites using electric field enhancements.  
Here, each site has an electrode associated therewith  
for selectively generating an electric field thereby.  
The electric field is generated by applying an electric  
15 potential between an electrode at the site and a counter  
electrode at a peripheral portion of the chip. To  
attract DNA fragments to the site, the polarity of the  
electric potential is selected to generate an electric  
field having a polarity opposite to the charge of the  
20 DNA fragments. To dehybridize the site, an electric  
field having the same polarity as the DNA fragments can  
be generated to repel the DNA fragments from the site.

Various approaches have been utilized to detect a  
hybridization event at a binding site. In some systems,  
25 a fluorescence or a scattering of light associated with  
the hybridization event is optically sensed to detect  
the hybridization event. A difficulty with this  
approach is in the differentiation of the fluorescence  
or scattering associated with the hybridization from  
30 background fluorescent or scatter light. To achieve a  
sufficient signal-to-noise quantity, expensive optical  
detectors such as confocal microscopes or cooled CCD  
cameras are utilized.

0

## Brief Description of the Drawings

The invention is pointed out with particularity in the appended claims. However, other features of the invention will become more apparent and the invention  
5 will be best understood by referring to the following detailed description in conjunction with the accompanying drawings in which:

FIG. 1 is a block diagram of an embodiment of an apparatus for sensing a binding of a molecule to a  
10 molecular receptor;

FIG. 2 is an illustration of a preferred embodiment of an apparatus for sensing a binding of one or more molecules to one or more molecular receptors;

FIG. 3 is a flow chart of an embodiment of a method  
15 of sensing a binding of a molecule with a molecular receptor at a binding site in a molecular detection apparatus; and

FIG. 4 illustrates the detection of a DNA hybridization event using an apparatus in accordance  
20 with the present invention;

FIG. 5 is a schematic diagram of an embodiment of a circuit for detecting a binding of a molecule to a molecular receptor;

FIG. 6 is a schematic diagram of another embodiment  
25 of a circuit for detecting a binding of a molecule to a molecular receptor;

FIG. 7 is a top view of an alternative pattern of a magnetoresistive layer; and

FIG. 8 is a top view of a second alternative  
30 pattern of a magnetoresistive layer.

0 Detailed Description of a Preferred Embodiment

Embodiments of the present invention advantageously provide a method and apparatus for sensing target molecules, such as antibodies, DNA strands, or other  
5 biopolymers, having an enhanced magnetic property. In particular, the structure of each of the target molecules is modified to include a magnetic member. A magnetoresistive member is located at a binding site to sense a magnetic field from target molecules proximate  
10 thereto. Hence, the magnetoresistive member can sense target molecules bound to molecular receptors at the binding site. This approach is advantageous in terms of sensitivity and background noise suppression since no naturally magnetic background molecules are encountered,  
15 and since the magnetoresistance effect is effectively confined to a surface of the magnetoresistive member.

FIG. 1 is a block diagram of an embodiment of an apparatus for sensing a binding of a molecule 10 to a molecular receptor 12. In general, the molecular  
20 receptor 12 is selected in dependence upon the molecule 10 which is to be detected. The molecular receptor 12 typically includes a biological or synthetic molecule having a specific affinity to the molecule 10 to be detected.

25 The molecular receptor 12 can include a chain of at least one nucleotide which hybridizes with a complementary chain of at least one nucleotide included in the molecule 10. Here, for example, the molecular receptor 12 can include a DNA probe for detecting a  
30 corresponding, complementary DNA sequence in the molecule 10. It is noted, however, that the scope of the present invention is not limited to sensing the hybridization of DNA molecules. Embodiments of the

0 present invention can be utilized in applications which include, but are not limited to, detection of antibody-antigen binding events (wherein the molecule 10 and the molecular receptor 12 include an antibody-antigen pair) and detection of other biopolymer target molecules.

5 The apparatus includes a substrate 14 which supports a binding site 16 for receiving the molecular receptor 12. The apparatus further includes a magnetoresistive member 18 integrated with the substrate 14 and located proximate to the binding site 16. In  
10 general, the magnetoresistive member 18 is formed of a material having a conductance or a resistance which is dependent upon its magnetization. The conductance or the resistance can be dependent upon the magnitude of the magnetization, and a direction of magnetization  
15 relative to the direction of current flow in the magnetoresistive member 18. Hence, the magnetoresistive member 18 has a conductance, or equivalently a resistance, which is modified by a magnetic field associated with the molecule 10 when the molecule 10  
20 comes in proximity thereto. This proximity can occur, for example, when the molecule 10 binds to the molecular receptor 12.

At least a portion of the magnetic field associated with the molecule 10 is from a magnetic member 20  
25 attached to the molecule 10. The magnetic member 20 is utilized to significantly enhance the magnitude of the magnetic field associated with the molecule. Preferably, substantially all of magnetic field associated with the molecule 10 is generated by the  
30 magnetic member 20.

The magnetic member 20 has the form of a magnetic bead attached to the molecule 10. The magnetic bead can have a spherical form, with a diameter on the order of



0 0.1 to 1.0  $\mu\text{m}$ . If the molecule 10 includes a polymer chain, the magnetic member 20 can be attached to an end of the polymer chain using conventional primer techniques. This allows the magnetic member 20 to be attached to an end of a DNA molecule, for example.

5 In general, the magnetoresistive member 18 can have any of a variety of shapes and/or forms using a variety of magnetoresistive materials. In one embodiment, the magnetoresistive member 18 has the form of a thin-film layer integrated with the substrate 14. The thin-film  
10 layer is formed of a magnetic material which exhibits the giant magnetoresistance effect. Here, the resistance of the thin-film layer is substantially enhanced, or equivalently, the conductance of the thin-film layer is substantially reduced, when the thin-film  
15 layer is subjected to a magnetic field. Other materials which exhibit a reduced resistance, rather than an enhanced resistance, when subjected to a magnetic field may also be utilized.

To read out a modified conductance or a modified  
20 resistance, the apparatus can further include a readout device 22 coupled to the magnetoresistive member 18. The readout device 22 produces a signal indicative of the modified conductance or the modified resistance of the magnetoresistive member 18 resulting from the  
25 magnetic field associated with the molecule 10. In a preferred embodiment, the readout device 22 includes a transistor, such as a thin-film transistor, integrated with the substrate 14.

Although illustrated in terms of a single molecular  
30 receptor at the binding site 16, it is noted that embodiments of the present invention are typically utilized with a plurality of like molecular receptors located at the binding site 16. Here, the plurality of

0   like molecular receptors are utilized for detecting a  
predetermined molecular structure in a sample of target  
molecules. Further, it is noted that embodiments of the  
present invention typically have an array of binding  
sites supported by the substrate 14, rather than a  
5   single binding site as illustrated. Here, each of the  
binding sites can be utilized for detecting a different  
molecular structure within a sample of target molecules.

FIG. 2 is an illustration of a preferred embodiment  
of an apparatus for sensing a binding of one or more  
10   molecules to one or more molecular receptors 30. The  
apparatus includes a substrate 32 which defines a  
binding site 34. A magnetoresistive layer 36 is  
integrated with the substrate 32. The magnetoresistive  
layer 36 is located in proximity to the binding site 34.  
15   Preferably, the magnetoresistive layer 36 includes a  
thin-film layer of a magnetic material capable of  
producing the giant magnetoresistance effect. The thin-  
film layer is deposited onto the substrate 32 using  
fabrication techniques known in the art.

20   Optionally, a plurality of interdigitated contacts  
is integrated with the substrate 32 to couple the  
magnetoresistive layer 36 to a readout device 40. The  
interdigitated contacts can be utilized to reduce the  
resistance sensed through the magnetoresistive layer 36.  
25   The use of the interdigitated contacts may be  
undesirable if the change in resistance of the  
magnetoresistive layer 36 is small when subjected to a  
magnetic field. Here, single contacts can be utilized  
to couple the magnetoresistive layer 36 to the readout  
30   device 40. Embodiments utilizing single contacts are  
illustrated in FIGS. 7 and 8.

In this embodiment, the readout device 40 has the  
form of a thin-film transistor which is integrated with

0 the substrate 32. The thin-film transistor includes a  
source 42, a gate 44, and a drain 46. Either the source  
42 or the drain 46 is coupled to a first set 48 of the  
interdigitated contacts 38 by an interconnect 50  
integrated with the substrate 32. The gate 44 is  
5 coupled to a second set 52 of the interdigitated  
contacts by an interconnect 54 integrated with the  
substrate 32. The plurality of interdigitated contacts  
and the readout device 40 are fabricated into the  
substrate using techniques known in the art.

10 The readout device 40 is utilized to read a change  
in resistance or conductance of the magnetoresistive  
layer 36. A change in the resistance of the  
magnetoresistive layer 36 is sensed by an output signal,  
formed at either the source 42 or the drain 46, in  
15 response to an input signal applied to the gate 44. The  
change in resistance is detected when the output signal  
is beyond a predetermined threshold. The input signal  
and the output signal can be in the form of either a  
voltage or a current, and can be either an AC signal or  
20 a DC signal.

FIG. 3 is a flow chart of an embodiment of a method  
of sensing a binding of a molecule with a molecular  
receptor at a binding site in a molecular detection  
apparatus. As indicated by block 60, the method  
25 includes a step of providing a magnetoresistive member  
proximate to the binding site. It is preferred that the  
magnetoresistive member be provided in the context of  
any of the embodiments of a molecular detection  
apparatus as described herein. It is noted, however,  
30 that alternative embodiments of the method are not  
limited to these apparatus.

As indicated by block 62, the method includes a  
step of sensing a modified electrical characteristic of

0 the magnetoresistive member when the molecule binds with  
the molecular receptor. The modified electrical  
characteristic results from a magnetic field associated  
with the molecule being proximate to the  
magnetoresistive member. As stated earlier, at least a  
5 portion of the magnetic field associated with the  
molecule, and preferably all of the magnetic field  
associated with the molecule, is from a magnetic member  
attached to the molecule.

Such an electrical characteristic which can be  
10 modified includes, but is not limited to, a DC  
resistance, a DC conductance, an AC resistance, an AC  
conductance of the magnetoresistive member. Hence, the  
step of sensing the modified electrical characteristic  
of the magnetoresistive member can include sensing a  
15 modified conductance or a modified resistance of the  
magnetoresistive member resulting from the magnetic  
field associated with the molecule. The modified  
conductance or modified resistance can be sensed either  
directly or indirectly, and can be sensed using either  
20 an AC signal or a DC signal applied to the  
magnetoresistive member.

As indicated by block 64, the method can further  
include a step of producing a signal indicative of the  
modified conductance or modified resistance of the  
25 magnetoresistive member resulting from the magnetic  
field associated with the molecule. The signal can be  
produced by a readout device coupled to the  
magnetoresistive member, such as the readout device 22  
of FIG. 1. As illustrated in FIG. 2, the readout device  
30 can include a transistor which is integrated with a  
substrate which supports the binding site. Here, the  
readout device is coupled to the magnetoresistive member  
by a plurality of interdigitated contacts.

0           The signal produced by the readout device can be in the form of a voltage or a current, and can be either an AC signal or a DC signal. The signal is indicative of a modified conductance or a modified resistance when a measure thereof is beyond a predetermined threshold.

5           The measure of the signal can be a DC level of either voltage or current. Alternatively, the measure of the signal can be a magnitude of an AC voltage or current.

FIG. 4 illustrates the detection of a DNA hybridization event using an apparatus in accordance with the present invention. The apparatus includes a first magnetoresistive layer 80 and a second magnetoresistive layer 82 supported by a substrate 84. The first magnetoresistive layer 80 is located proximate to a first binding site 86. The second magnetoresistive layer is located proximate to a second binding site 88.

15           The first binding site 86 receives a molecular receptor in the form of a first oligonucleotide probe 90. The first oligonucleotide probe 90 is attached to the first magnetoresistive layer 80 by a primer 92. Similarly, the second binding site 94 receives a molecular receptor in the form of a second oligonucleotide probe 96. The second oligonucleotide probe 96 is attached to the second magnetoresistive layer 82 by a primer 98.

25           For illustrative purposes, the first oligonucleotide probe 90 includes a T-T-G-C-C-A sequence of nucleotides, and the second oligonucleotide probe 96 includes an A-A-C-G-G-T sequence of nucleotides. As is known in the art, "A" is an abbreviation for adenine, "C" is an abbreviation for cytosine, "G" is an abbreviation for guanine, and "T" is an abbreviation for thymine. The first oligonucleotide probe 90 is utilized to detect molecules having a complementary sequence,

0   namely an A-A-C-G-G-T sequence, of nucleotides  
therewithin. The second oligonucleotide probe 96 is  
utilized to detect molecules having a T-T-G-C-C-A  
sequence therewithin.

5       A sample of single-stranded DNA molecules is  
applied to the apparatus. Each of the single-stranded  
DNA molecules has a magnetic member 100 and 102 attached  
thereto. The first oligonucleotide probe 90 partially  
hybridizes with a G-A-C-G-G-T sequence of nucleotides  
within a first DNA molecule 104. The second  
10   oligonucleotide probe 96 fully hybridizes with a T-T-G-  
C-C-A sequence of nucleotides within a second DNA  
molecule 106. The binding energy of attachment is  
determined by the degree of match between the target  
molecules and the probes.

15       After hybridization, a wash or melt step can be  
performed to remove non-attached or poorly-attached  
target molecules. As a result, the first DNA molecule  
104 would likely be removed from the first binding site  
86, while the second DNA molecule 106 would likely  
20   remain at the second binding site 88. In general, the  
remaining attached target molecules are present in  
dependence upon the degree of matching to the probe  
molecules.

25       The magnetic member 102 attached to the second DNA  
molecule 106 modifies the resistance of the second  
magnetoresistive layer 82. The modified resistance is  
sensed to conclude that the sample of DNA molecules  
includes a T-T-G-C-C-A sequence within its structure.

30       FIG. 5 is a schematic diagram of an embodiment of a  
circuit for detecting a binding of a molecule to a  
molecular receptor. The circuit is utilized to detect a  
change in the resistance of a magnetoresistive member,  
which is schematically represented by a resistor 120.

0       The resistor 120 is coupled between a gate 122 of a transistor 124 and ground 126. A source 128 of the transistor 124 is directly coupled to the ground 126. A reference resistor 130 is coupled between the gate 122 and a first voltage source, VBIAS. A load resistor 132  
5       is coupled between a second voltage source, VDD, and a drain 134 of the transistor 124.

          The reference resistor 130 and the magnetoresistive member (resistor 120) form a voltage divider which divides the first voltage source, VBIAS, for application  
10       to the gate 122. A change in the resistance of the magnetoresistive member (resistor 120) changes the voltage applied to the gate 122, and hence, changes the current which flows through the drain 134. The change in current through the drain 134 changes the voltage  
15       drop across the load resistor 132, and hence, changes the voltage at the drain 134. The voltage signal produced by the drain 134 is utilized to detect the binding event.

          The transistor 124 can be embodied by the readout device 40 from FIG. 2. The reference resistor 130 and  
20       the load resistor 132 can be integrated with the substrate 32 which supports the magnetoresistive member and the readout device 40. Alternatively, the reference resistor 130 and the load resistor 132 can be  
25       externally-coupled components.

          FIG. 6 is a schematic diagram of another embodiment of a circuit for detecting a binding of a molecule to a molecular receptor. The circuit is utilized to detect a change in the resistance of a magnetoresistive member,  
30       which is schematically represented by a resistor 140.

          Here, the resistor 140 is coupled between a gate 142 of a transistor 144 and a first voltage source, VBIAS. A reference resistor 146 is coupled between the

0 gate 142 and ground 148. The magnetoresistive member  
(resistor 140) and the reference resistor 146 form a  
voltage divider which divides the first voltage source,  
VBIAS, for application to the gate 422. A change in the  
resistance of the magnetoresistive member (resistor 140)  
5 changes the voltage applied to the gate 142.

As with the embodiment of FIG. 5, a source 150 of  
the transistor 144 is directly coupled to the ground  
148, and a load resistor 152 is coupled between a second  
voltage source, VDD, and a drain 154 of the transistor  
10 144. The change in resistance of the magnetoresistive  
member (resistor 140) changes the voltage at the drain  
154. The voltage signal produced by the drain 154 is  
utilized to detect the binding event.

The transistor 144 can be embodied by a readout  
15 device integrated onto a substrate which supports the  
magnetoresistive member. The reference resistor 146 and  
the load resistor 152 can also be integrated with this  
substrate. Alternatively, the reference resistor 146  
and the load resistor 152 can be externally-coupled  
20 components.

The magnetoresistive layer 36 in FIG. 2 is  
illustrated to have a substantially rectangular pattern.  
Alternative patterns for the magnetoresistive layer 36  
are shown in FIGS. 7 and 8. These patterns are  
25 beneficial to increase the change in resistance of the  
magnetoresistive layer 36 when subjected to a magnetic  
field.

FIG. 7 is a top view of an alternative pattern of a  
magnetoresistive layer 160. Here, the magnetoresistive  
30 layer 160 is spiral-shaped (or serpentine-shaped) to  
increase the effective length between a first contact  
162 and a second contact 164. Increasing the effective  
length acts to magnify changes in the resistivity of the



0     magnetoresistive layer 160 as sensed by the resistance  
between the first contact 162 and the second contact  
164.

FIG. 8 is a top view of a second alternative  
pattern of a magnetoresistive layer 170. The  
5     magnetoresistive layer 170 is zig-zag shaped to increase  
the effective length between a first contact 172 and a  
second contact 174. The increased length magnifies the  
changes in resistance sensed between the first contact  
172 and the second contact 174.

10         Thus, there has been described herein a concept, as  
well as several embodiments including preferred  
embodiments of a magnetoresistance-based method and  
apparatus for molecular detection.

Because the various embodiments of the present  
15     invention magnetoresistively sense a magnetic field  
generated by a magnetic member attached to a non-  
magnetic molecule, they provide a significant  
improvement in suppressing background noise from non-  
magnetic background molecules. Further, since the giant  
20     magnetoresistance effect is effectively confined to the  
surface of the magnetoresistive member, the resulting  
sensitivity for detection is high.

Additionally, the various embodiments of the  
present invention as herein-described integrate the  
25     magnetoresistive member and a readout device with a  
substrate to form an integrated molecular detection  
device. In particular, an array of magnetoresistive  
member/readout device combinations can be formed on a  
substrate. The readout devices can be interconnected in  
30     a manner similar to active matrix display devices to  
provide for matrix addressing thereof.

It will be apparent to those skilled in the art  
that the disclosed invention may be modified in numerous

0 ways and may assume many embodiments other than the preferred form specifically set out and described above.

Accordingly, it is intended by the appended claims to cover all modifications of the invention which fall within the true spirit and scope of the invention.

5 What is claimed is:

## Claims

1. An apparatus for sensing a binding of a molecule to a molecular receptor, the apparatus comprising:
  - 5 a substrate which supports a binding site for receiving the molecular receptor; and
  - a magnetoresistive member integrated with the substrate and located proximate to the binding site, the magnetoresistive member having a conductance which is
  - 10 modified by a magnetic field associated with the molecule when the molecule binds to the molecular receptor.
2. The apparatus of claim 1 wherein at least a
- 15 portion of the magnetic field associated with the molecule is from a magnetic member attached to the molecule.
3. The apparatus of claim 1 wherein the molecular
- 20 receptor includes a chain of at least one nucleotide, and wherein the molecule includes a complementary chain of at least one nucleotide.
4. The apparatus of claim 1 wherein the molecule
- 25 and the molecular receptor include an antibody-antigen pair.
5. The apparatus of claim 1 further comprising a
- readout device coupled to the magnetoresistive member,
- 30 the readout device producing a signal indicative of a modified conductance of the magnetoresistive member resulting from the magnetic field associated with the molecule.

0           6.    A method of sensing a binding of a molecule  
with a molecular receptor at a binding site in a  
molecular detection apparatus, the method comprising the  
steps of:

5           providing a magnetoresistive member proximate to  
the binding site; and

          sensing a modified electrical characteristic of the  
magnetoresistive member when the molecule binds with the  
molecular receptor, the modified electrical  
10          characteristic resulting from a magnetic field  
associated with the molecule.

          7.    The method of claim 6 wherein at least a  
portion of the magnetic field associated with the  
molecule is from a magnetic member attached to the  
15          molecule.

          8.    The method of claim 6 wherein the molecular  
receptor includes a chain of at least one nucleotide,  
and wherein the molecule includes a complementary chain  
20          of at least one nucleotide.

          9.    The method of claim 6 wherein the step of  
sensing the modified electrical characteristic of the  
magnetoresistive member includes sensing a modified  
25          conductance of the magnetoresistive member resulting  
from the magnetic field associated with the molecule.

          10.   The method of claim 6 wherein the  
magnetoresistive member is integrated with a substrate  
30          which supports the binding site.

1/3

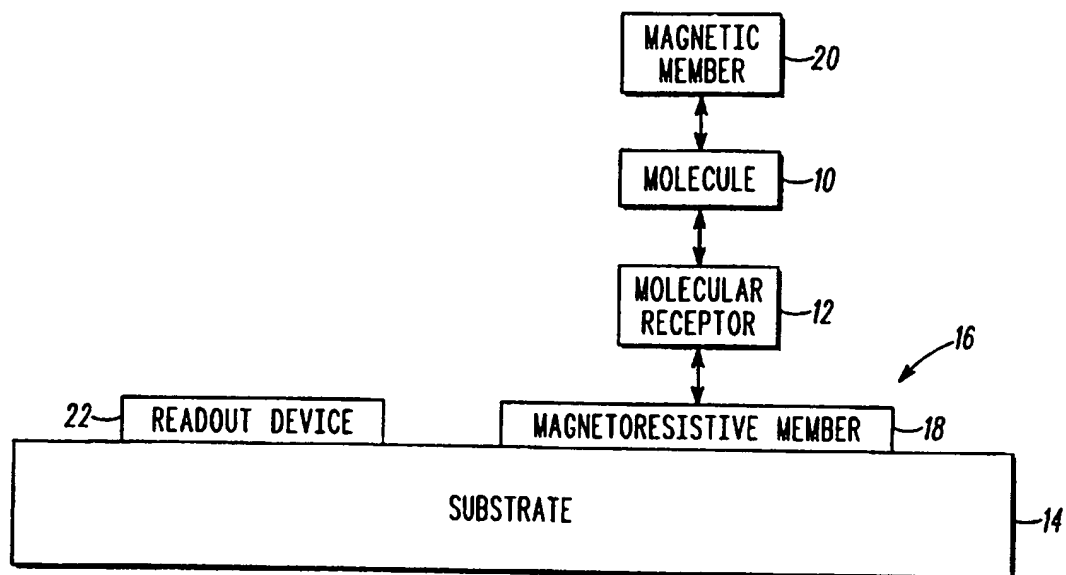


FIG. 1

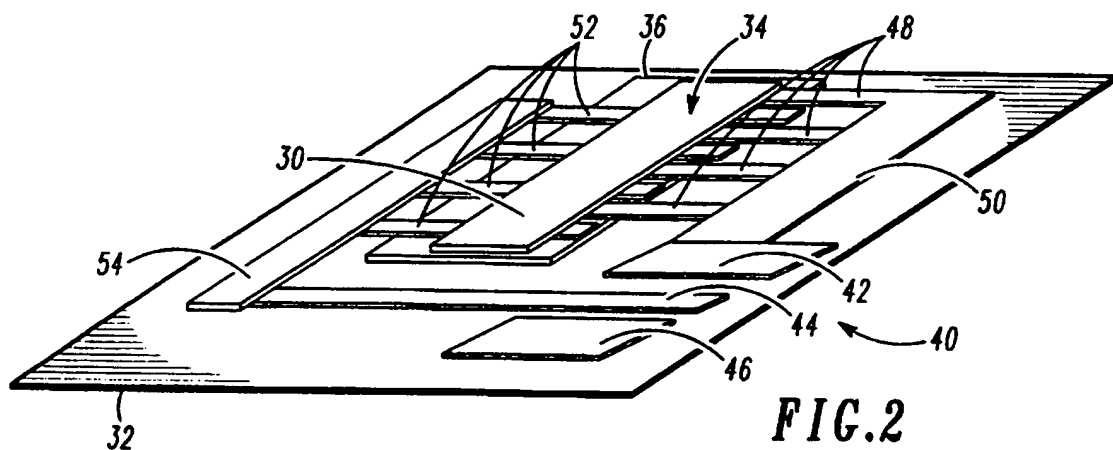


FIG. 2

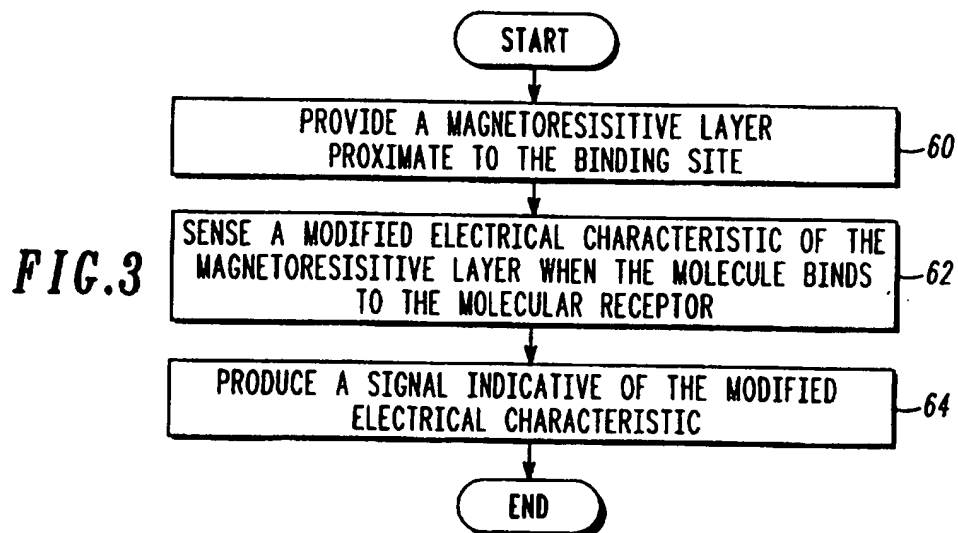


FIG. 3

2 / 3

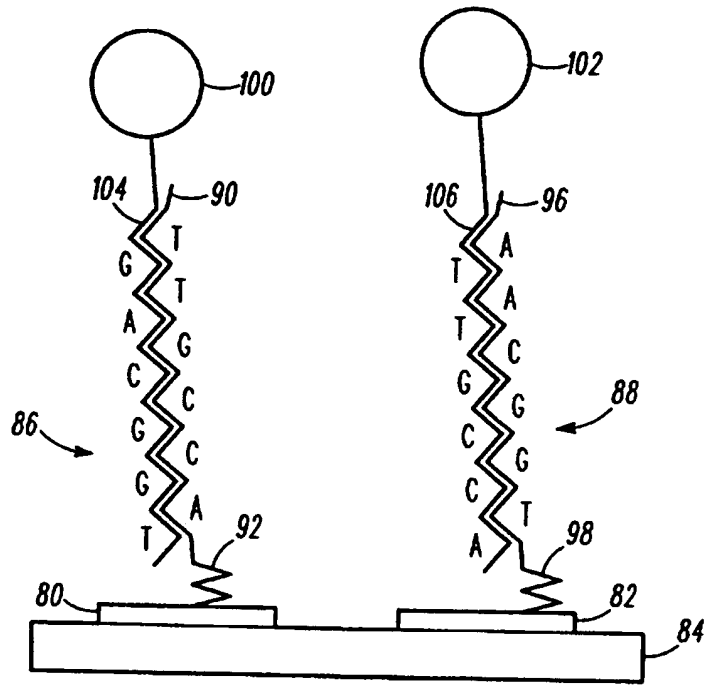


FIG. 4

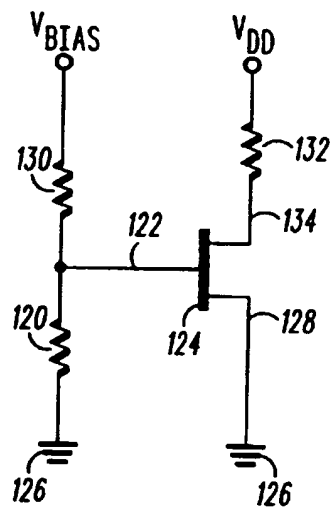


FIG. 5

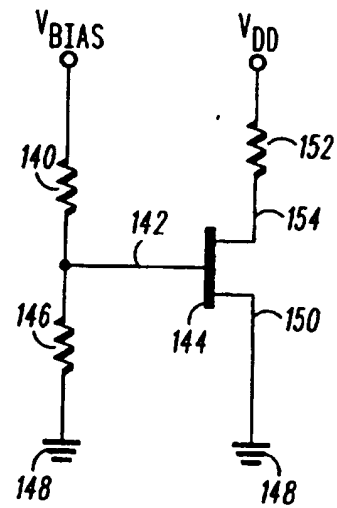
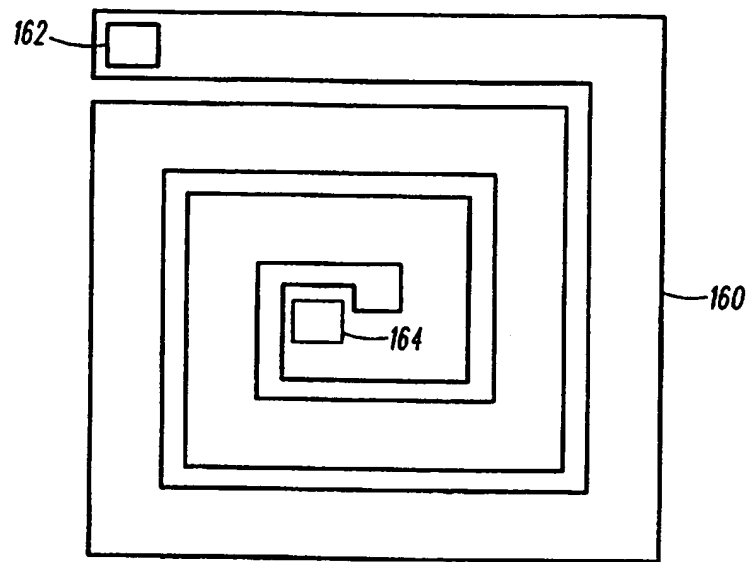
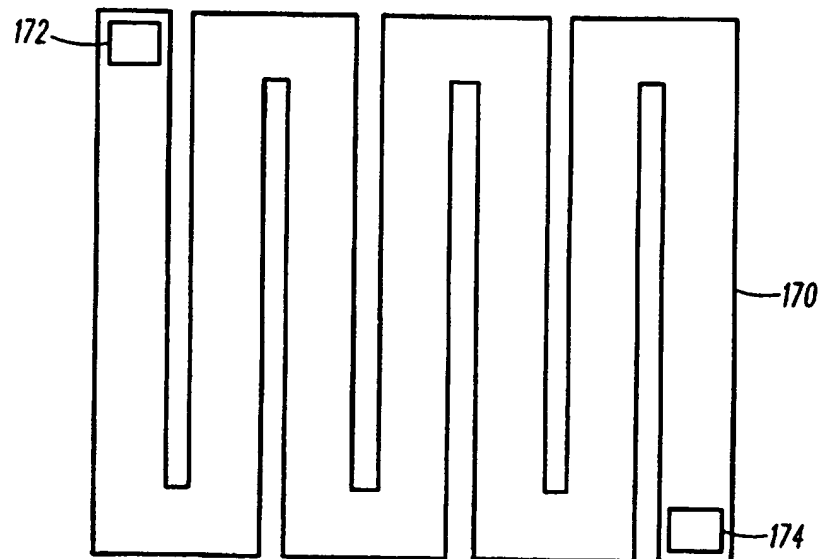


FIG. 6

3 / 3

**FIG. 7****FIG. 8**

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/06848

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :G01N 33/543

US CL :436/518

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

search terms: magnetic field, antigen, antigens, antibody, antibodies, conductance, magnetoresistive

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,219,335 A (EBERSOLE) 26 August 1980, see entire document.	1-10
A	US 5,466,348 A (HOLM-KENNEDY) 14 November 1995, see entire document.	1-10

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principles or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
*O* documents referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

31 JULY 1997

Date of mailing of the international search report

03 SEP 1997

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Authorized officer

CHRISTOPHER CHIN

Facsimile No. (703) 305-2230

Telephone No. (703) 308-0196



# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/06848

## B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

422/82.01;

435/6, 7.1, 287.1, 287.2;

436/149, 151, 518, 524, 525, 526, 806

**THIS PAGE BLANK (USPTO)**